


SACON *Electrolytic capacitors*

FZ series For VGA Power Supply Circuits.

****Long Life:D8~D10 2000hours**


****Ultra Low Impedance, Higer Ripple Current**

****Dimensions**

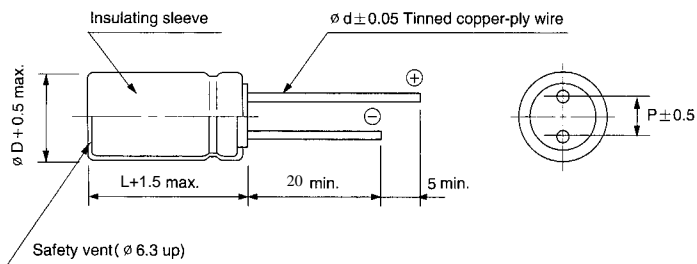

D	8	10	13
P	3.5	5.0	5.0
d	0.5	0.6	0.6

For dimensions of **D & L**, refer to the table 1

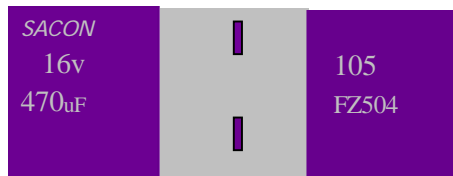

- Nominal capacitance
- Working voltage
- Polarity
- Series NO.
- Operating temperature range
- Date code

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT(table 1)

Table 1

Rated voltage (VDC)	Cap. (μF)	Dimensions		tan	Leakage Current (μA)	Ripple current (mA rms) 100KHz,105	Impedance 100KHz,20 ()max.
		D (mm)	L (mm)				
6.3	1000	8	12	0.24	189	1150	0.036
6.3	1500	10	12.5	0.24	283.5	1800	0.022
16	330	8	12	0.16	158.4	1150	0.036
16	470	8	12	0.16	225.6	1150	0.036
16	470	10	12.5	0.16	225.6	1800	0.022
16	1000	10	12.5	0.18	480	1800	0.022